
borrowed earth

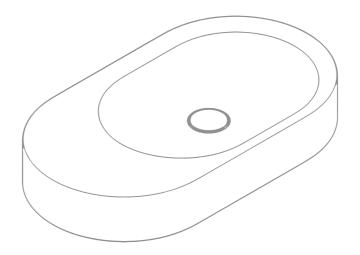

SPECIFICATION SHEET

OVER COUNTER FLOAT

INSTALLATION

IN THE BOX







Drain Kit
 Mountain Plumbing Products
 (MT740-2)
 20 Hole brass lavatory grid
 Drain with 6" Tailpiece and
 no overflow.



4. Manual

TOOLS REQUIRED



1. Level



2. Wrench




3. Pencil



4. Silicone


INSTALLATION

DRAIN KIT




Step 1

- 1. Disassemble MT-740 into parts (A), (B), (C).
- 2. Insert grid drain (A) into washbasin drain opening.



Step 2

Secure grid drain (A) to the washbasin with locknut assembly (B)



Step 3

- Insert tailpiece (C) into grid drain (A).
- 2. Place stone drain cover into drain cover surface.

+1 (310) 341-6931


+1 (323) 538-3630


WWW. BORROWEDEARTHCOLLABORATIVE.COM
INFO@ BORROWEDEARTHCOLLABORATIVE.COM

borrowed earth


OVER COUNTER FLOAT

REMOVER STONE DRAIN COVER







INSTALLATION



1. Use a slab of minimum 30mm thickness.



3. Place the Drain Kit in the Over Counter.



2. Drill the hole as shown in the diagram.



4. Flip the Over Counter then apply Silicone on the base's corner.

+1 (310) 341-6931


+1 (323) 538-3630

WWW. BORROWEDEARTHCOLLABORATIVE.COM

borrowed earth

INFO@ BORROWEDEARTHCOLLABORATIVE.COM

OVER COUNTER FLOAT

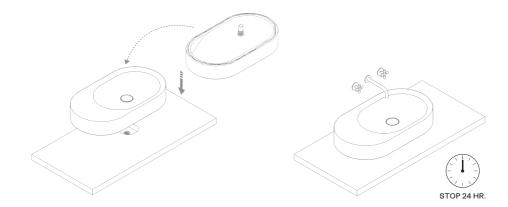

5. Gently place the over counter on the slab.

6. Wait 24 Hrs. for the silicone to dry.

borrowed earth

Borrowed Earth celebrates our inviolable connection to nature and attempts to recreate the innate joy of cohabiting amist it.

